


## Deep Groove Ball Bearing

6000 Series-6012 ZZ,6012 RS,6012

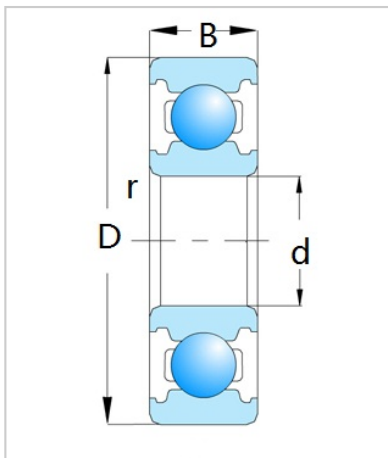

## Bearing Designation

Open	<b>6012</b>
RS	<b>6012 RS</b>
ZZ	<b>6012 ZZ</b>
Dimension [mm]	
re	<b>60</b>
re	95
segundo	18
rs min	1.1
Basic load ratings (kN)	
cr	29.5
cor	23.2
Speed ratings(rpm)	
Grasa	7300
Petróleo	8300
Peso	
(Kg)	0.414

Main dimensions according to DIN 625-1. Ball bearings of the extra-light 60 series can still support radial loads despite their low weight. Compared to deep groove ball bearings of the 63 medium series they require a smaller installation space at the same inside diameter, only weigh half of them and allow higher speeds.

A standard internal clearance (CN) is suitable for the operation of the bearing in case of ordinary temperatures and for customary fits. An increased internal clearance (C3) is recommendable in case of high temperature gradients between the rings or in case of fixing the bearing through a press fit.

## Seals

Plastic seals (RS/2RS) have the optimum sealing action with increased friction. Metal seals (Z/ZZ) are suitable for higher speeds, but they have a limited sealing action as they seal contactless. Open, seal-less bearings are suitable for extremely high speeds and - furthermore - they can be regreased more easily. However, they are more susceptible to soiling.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com