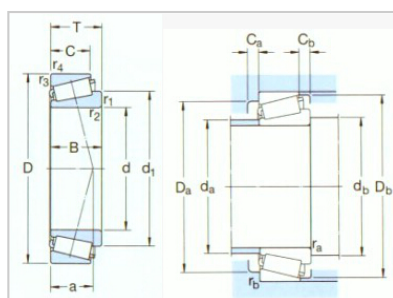


Tapered Roller Bearing

30300 Series-30314J2/Q

Designacion **30314J2/Q**

Dimensiones principales (mm)

d1 70

re 150

segundo 38

Basic load ratings [KN]

dyc(Cr) 220

stc(Cor) 260

Pu **31**

Speed ratings [rpm]

Speed Ratings 3400

Limiting Speed 4500

Weight(Kg) 2.90

ISO335

Dimensions (ABMA) 2GB

Dimensions [mm]

re 70

d1 105

segundo 35

C **30**r1,2(min) **3**

r3,4(min) 2.5

una 29

Abutment and fillet dimensions [mm]

da(max) 90

db (min) 82

Da(min) 130

Da (max) 138

Db(min) 140

Ca(min) 5

Cb(min) 8

ra (max) 2.5

rb (max) **2**

Valor

e 0.35

Y 1.7

Yo 0.9

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly

and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com