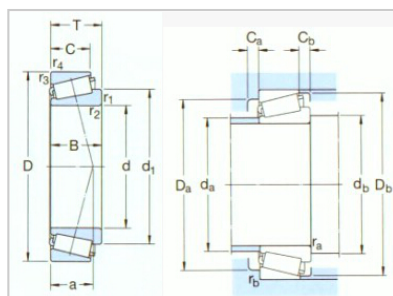


## Tapered Roller Bearing

33200 Series-33213TN9/Q

Designacion **33213TN9/Q**

Dimensiones principales (mm)

d1 65

re 120

segundo 41

Basic load ratings [KN]

dyc(Cr) 194

stc(Cor) 270

Pu 30.5

Speed ratings [rpm]

Speed Ratings 3800

Limiting Speed 5300

Weight(Kg) 2.05

ISO335

Dimensions (ABMA) 3EE

Dimensions [mm]

re 65

d1 92.1

segundo 41

C **32**r1,2(min) **2**

r3,4(min) 1.5

una 29

Abutment and fillet dimensions [mm]

da(max) 75

db (min) 74

Da(min) 102

Da (max) 113

Db(min) 115

Ca(min) 6

Cb(min) **9**ra (max) **2**

rb (max) 1.5

Valor

e 0.4

Y 1.5

Yo 0.8

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly

and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com