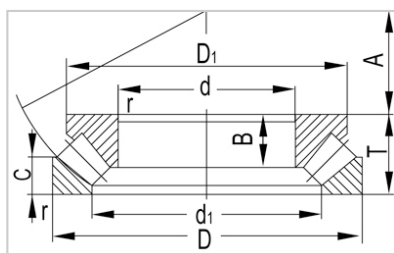


Thrust Spherical Roller Bearing

29200 Series-29320E

Designacion **29320E**

Dimensiones principales (mm)

re 100

re 170

H 42

Basic load ratings (KN)

dyc Cr 465

stc Cor 1290

Pu (kN) 156

Min Loading A 0.16

Speed ratings rpm (r/min)

Reference speed 2200

Limiting Speed 3600

Weight(kg) 3.65

Dimensions (mm)

re 100

d1 152.3

D1 127.5

segundo 26.2

B1 36.3

C 20.5

r1,2 Min 1.5

s 58

Abutment and fillet dimensions (mm)

da Min 130

db1 Max 107

db2 Max 107

Ha Min aug

Da Max 147

ra Max 1.5