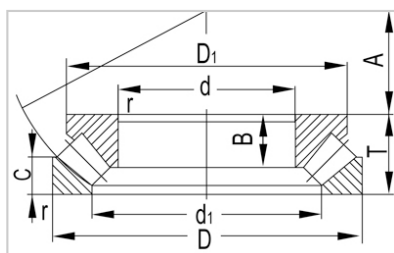


Thrust Spherical Roller Bearing

29300 Series-29326E

Designacion **29326E**

Dimensiones principales (mm)

re 130

re 225

H 58

Basic load ratings (KN)

dyc Cr 865

stc Cor 2500

Pu (kN) 280

Min Loading A 0.59

Speed ratings rpm (r/min)

Reference speed 1600

Limiting Speed 2600

Weight(kg) **9**

Dimensions (mm)

re 130

d1 203.4

D1 165.5

segundo 36.7

B1 50.6

C 30.1

r1,2 Min 2.1

s 75.6

Abutment and fillet dimensions (mm)

da Min 175

db1 Max 138

db2 Max 143

Ha Min aug

Da Max 194

ra Max **2**