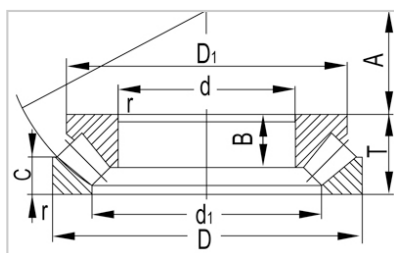


Thrust Spherical Roller Bearing

29300 Series-29412E

Designacion **29412E**

Dimensiones principales (mm)

re 60

re 130

H 42

Basic load ratings (KN)

dyc Cr 390

stc Cor 915

Pu (kN) 114

Min Loading A 0.08

Speed ratings rpm (r/min)

Reference speed 2800

Limiting Speed 5000

Weight(kg) 2.6

Dimensions (mm)

re 60

d1 112.2

D1 85.5

segundo 27

B1 36.7

C 21

r1,2 Min 1.5

s 38

Abutment and fillet dimensions (mm)

da Min 90

db1 Max 67

db2 Max 67

Ha Min aug

Da Max 107

ra Max 1.5