


Double Row Angular Contact Ball Bearings

QJ200 Series-**QJ207**

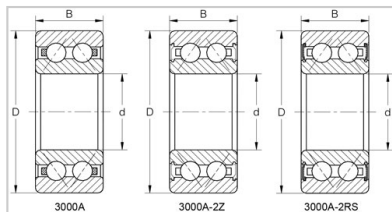

Designacion **QJ207**

Dimensiones principales (mm)

re 35

re 72

segundo 17

r (min) 1.1

Basic load ratings(KN)

cr 41000

cor 61500

capacidades de carga (KGF)

cr 4200

cor 6250

La limitación de velocidad (rpm)

Grasa 7500

Petróleo 10000

Distance of action point

a0(mm) 37.5

Installation dimensions(mm)

da (min) 42

Da (max) 65

ra (max) 1

Peso

(kg) 0.35

Angular contact ball bearings have inner and outer ring raceways that are displaced relative to each other in the direction of the bearing axis. This means that these bearings are designed to accommodate combined loads, i.e. simultaneously acting radial and axial loads.

The axial load carrying capacity of angular contact ball bearings increases as the contact angle increases. The contact angle is defined as the angle between the line joining the points of contact of the ball and the raceways in the radial plane, along which the combined load is transmitted from one raceway to another, and a line perpendicular to the bearing axis

The most commonly used designs are:

single row angular contact ball bearings

double row angular contact ball bearings

four-point contact ball bearings

bearing.com